



# Home and Building control LUXORliving

### Description

- 4-way binary input sensor interface LUXORliving
- 6-pole cable connection
- Can be installed in flush-mounted sockets with conventional sensors/ switches
- Software functions: Switch/push-button, dimming, blinds
- Colour coding of wiring pairs



### Technical data


	LUXORliving T4
Operating voltage KNX	Bus voltage, ≤10 mA
Installation type	in flush-mounted socket
Number of inputs	4
Max. cable length	30 m
Length connecting wires	25 cm

	LUXORIiving T4
Contact current	0.5 mA
Type of protection	IP 20
Protection class	III


LUXORIiving T4 Item no.: 4800404




Connection example

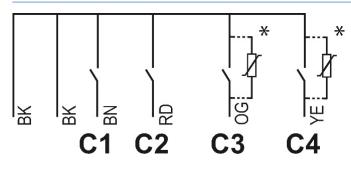

Scale drawings

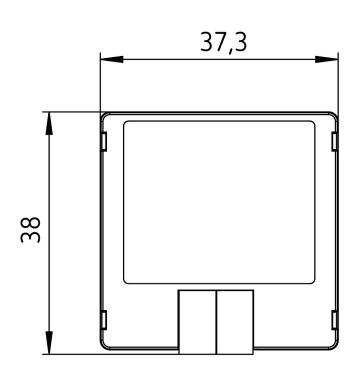

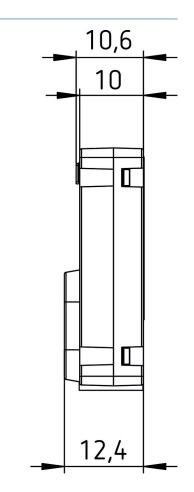

## LUXORliving T4 Item no.: 4800404



### Accessories

Temperature sensor Item no.: 9070321



Temperature sensor RAMSES IP 65 Item no.: 9070459

