

# LUXORliving H6 24V

Item no.: 4800441



Home and Building control  
LUXORliving

## Description

- LUXORliving heating actuator for controlling thermal actuators
- Option of channel-based actuator control: 24 V DC switching or 0–10 V DC continuous
- Integrated relay for demand-based control of heating circuit pump
- No room thermostat required: each channel has a temperature control
- Can be installed directly in the heating circuit distributor
- Screwless terminal technology
- Integrated power supply for max. 12 thermal actuators
- Continuous or switching actuating value can be selected
- Integrated valve protection - Manual operation on device




## Technical data

LUXORliving H6 24V	
Operating voltage KNX	<10 mA
Operating voltage	230 – 240 V AC 50 – 60 Hz
Frequency	50 – 60 Hz
Stand-by consumption	<1 W
Number of channels	6

LUXORliving H6 24V	
Switching output	5 A, 240 V AC potenzialfrei (Pumpe)
Ambient temperature	-5°C ... 50°C
Type of protection	IP 20
Protection class	II according to EN 60 669

## Connection example

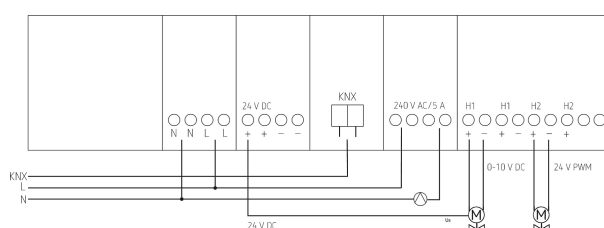

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4800441](http://www.theben.de/product/4800441)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

30/09/2020


Page 1 of 2

# LUXORliving H6 24V

Item no.: 4800441

**theben**  
energy saving comfort

## Scale drawings

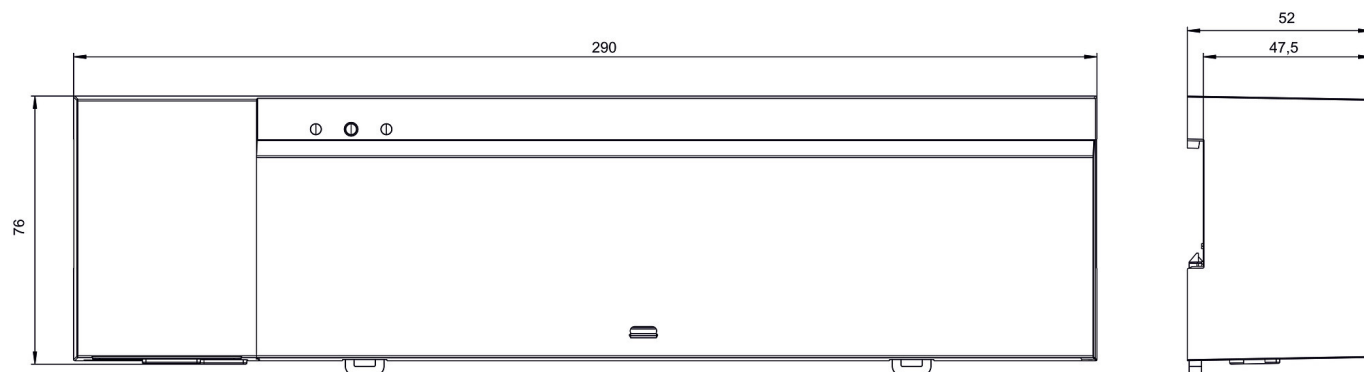

## Accessories

Actuator ALPHA 5 24 V

Item no.: 9070442

