

# LUXORliving J4

Item no.: 4800450

**theben**  
energy saving comfort

Home and Building control  
LUXORliving

## Description

- 4-way blind actuator LUXORliving
- For controlling drives for blinds, shutters, sun and vision protection devices
- Manual operation on device
- LED Up and Down switching status display for each channel



## Technical data

LUXORliving J4	
Operating voltage KNX	<10 mA
Operating voltage	110 – 240 V AC
Stand-by consumption	<0.3 W
Number of channels	4
Width	4 modules
Installation type	DIN rail

LUXORliving J4	
Output	NO contact, 6 A
Switching output	Potential-free, for SELV, if the whole device switches SELV
Type of protection	IP 20
Protection class	II according to EN 60 669

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4800450](http://www.theben.de/product/4800450)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.


30/09/2020

Page 1 of 2


# LUXORliving J4

Item no.: 4800450

## Connection example



## Scale drawings

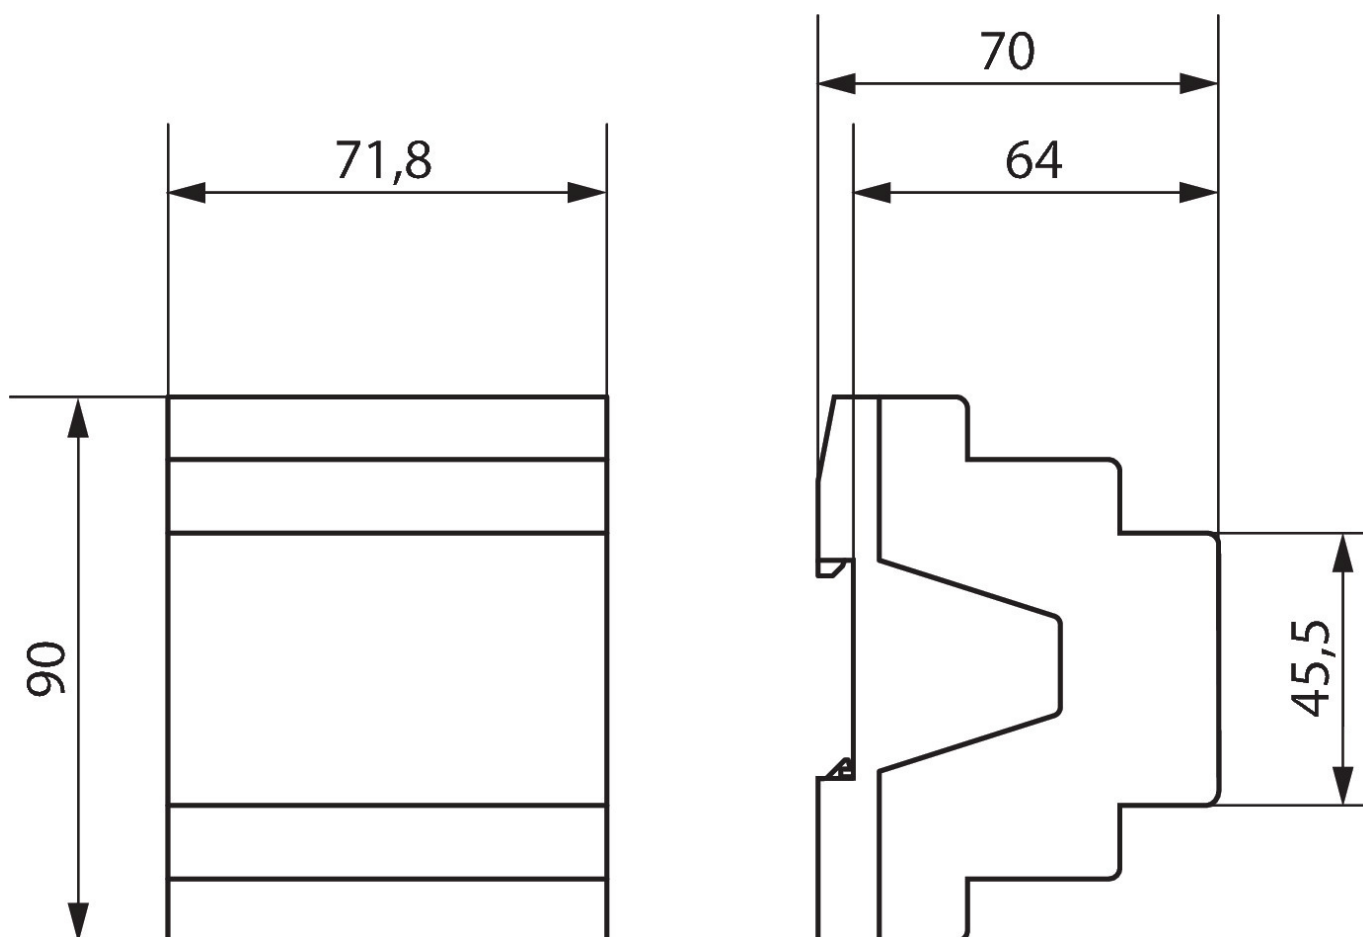

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4800450](http://www.theben.de/product/4800450)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.