


# LUXORliving J8

Item no.: 4800455

Home and Building control  
LUXORliving

## Description

- 8-way blind actuator LUXORliving
- For controlling drives for blinds, shutters, sun and vision protection devices
- Manual operation on device
- LED Up and Down switching status display for each channel

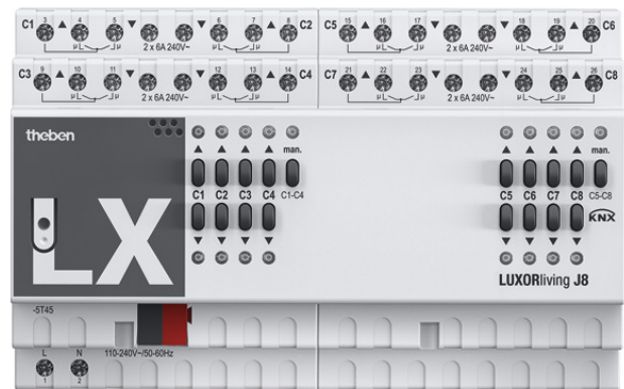


## Technical data

LUXORliving J8	
Operating voltage KNX	<10 mA
Operating voltage	110 – 240 V AC
Stand-by consumption	<0.5 W
Number of channels	8
Width	8 modules
Installation type	DIN rail

LUXORliving J8	
Output	NO contact, 6 A
Switching output	Potential-free, for SELV, if the whole device switches SELV
Type of protection	IP 20
Protection class	II according to EN 60 669

## Connection example

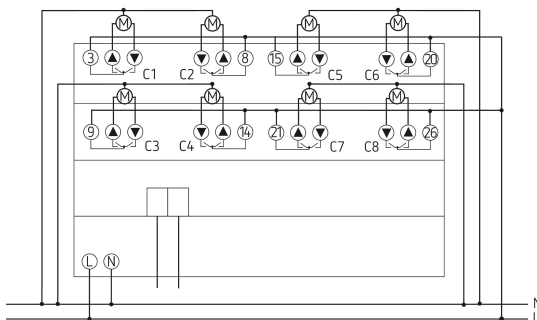

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4800455](http://www.theben.de/product/4800455)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# LUXORliving J8

Item no.: 4800455

## Scale drawings

