

# TU 4 RF KNX


Item no.: 4961604



Home and Building control  
KNX

## Description

- \*Available august 2020\*
- 4-way flush-mounted wireless push-button interface
- Secure communication via with support of „KNX Data Secure“
- 4 binary inputs for potential-free buttons and signaling contacts
- 1 additional input for temperature sensor
- Free assignment of the functions switching, dimming, blinds, temperature measurement and transmission
- Easy installation due to the compact housing
- Can be used with 4-way push-button module

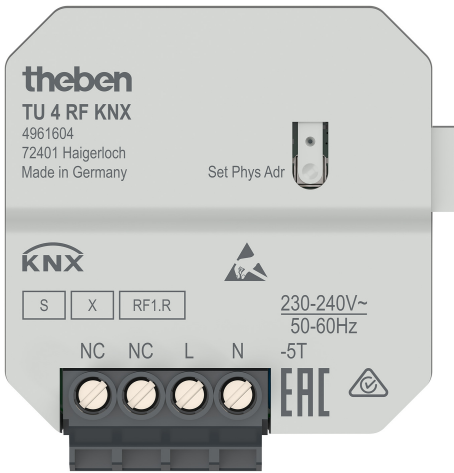

## Technical data

TU 4 RF KNX	
Operating voltage KNX	Bus voltage
Operating voltage	230 – 240 V AC 50 – 60 Hz
Frequency	50 – 60 Hz
Installation type	Flush-mounted

TU 4 RF KNX	
Ambient temperature	-5°C ... 45°C
Protection class	II

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4961604](http://www.theben.de/product/4961604)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# TU 4 RF KNX

Item no.: 4961604

**theben**  
energy saving comfort

## Scale drawings

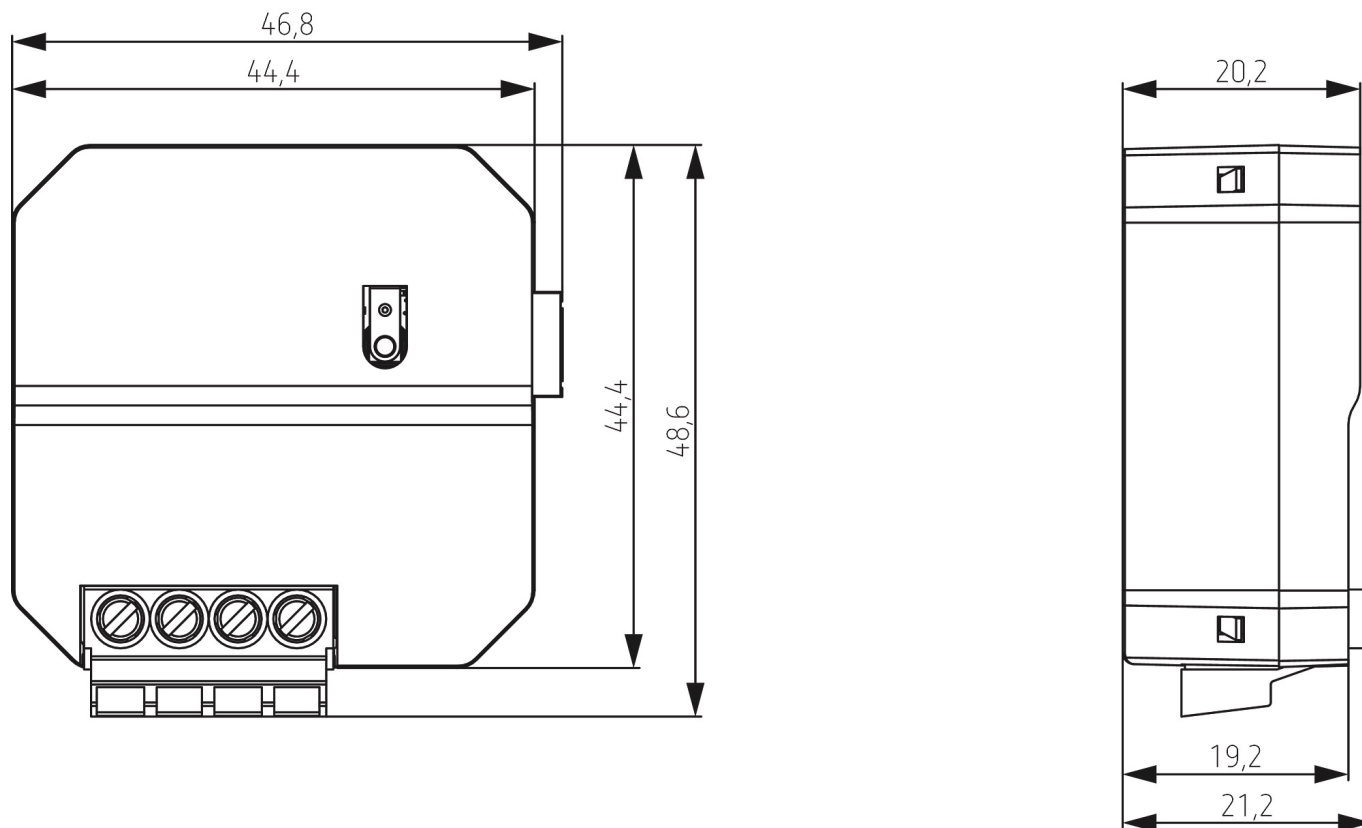


## Accessories

**Flush-mounted temperature sensor**  
Item no.: 9070496



**4-way push button module**  
Item no.: 9070806



Subject to technical changes and misprints

additional information at: [www.theben.de/product/4961604](http://www.theben.de/product/4961604)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

23/08/2020

Page 2 of 2