


# PS 160 mA T KNX

Item no.: 9070956

Home and Building control  
KNX

## Description

- 160 mA supply voltage
- 30 V DC auxiliary supply
- Power-supplying and monitoring of the KNX system voltage
- Reset key for 20 sec. bus reset
- Continuous short-circuit protection

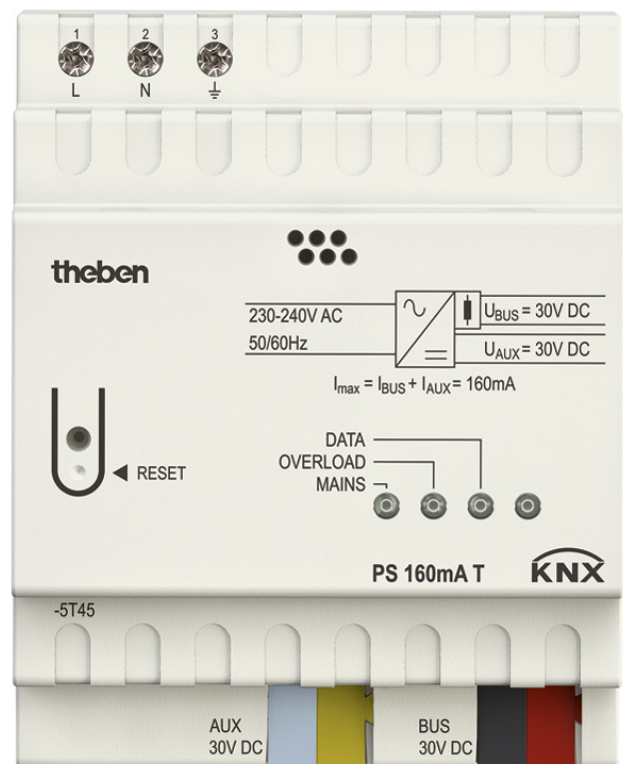

## Technical data

PS 160 mA T KNX	
Operating voltage KNX	Bus voltage, $\leq 12$ mA
Operating voltage	230 – 240 V AC 50 – 60 Hz
Frequency	50 – 60 Hz
Stand-by consumption	$\leq 0.8$ W
Width	4 modules
Installation type	DIN rail
Type of connection	KNX bus terminal
KNX output	1 line with integrated throttle drive

PS 160 mA T KNX	
Nominal voltage KNX	30 V DC, $\pm 2$ V, SELV
Nominal current KNX	160 mA
Uninterrupted short-circuit current	max. 0.5 A
Mains failure bridging time	min. 130 ms
Ambient temperature	-5°C ... 45°C
Protection class	II according to EN 60 730-1
Type of protection	IP 20

Subject to technical changes and misprints

additional information at: [www.theben.de/product/9070956](http://www.theben.de/product/9070956)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# PS 160 mA T KNX

Item no.: 9070956

**theben**  
energy saving comfort

## Scale drawings

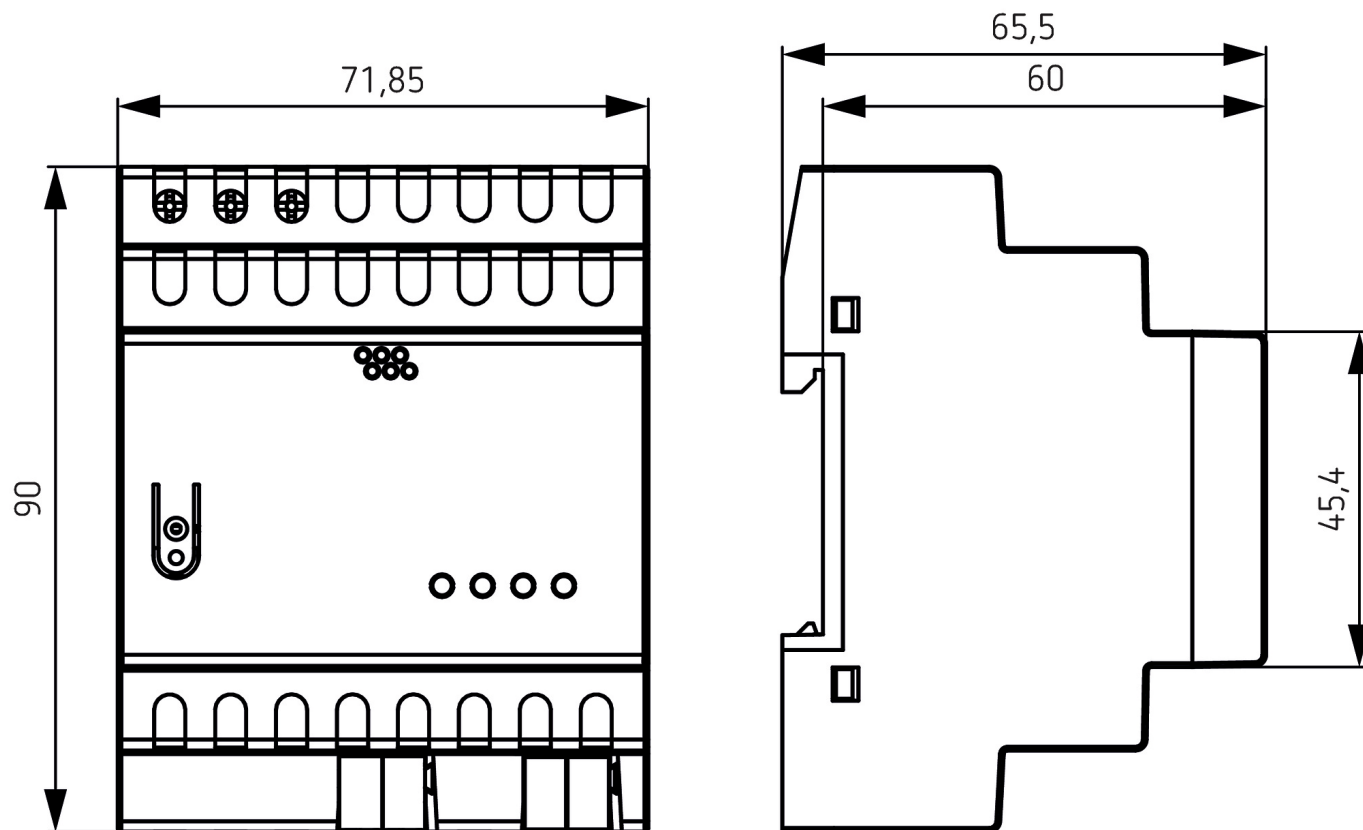

Subject to technical changes and misprints

additional information at: [www.theben.de/product/9070956](http://www.theben.de/product/9070956)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

20/07/2020

Page 2 of 2