


# Product data sheet

## Switch actuator, 2-gang

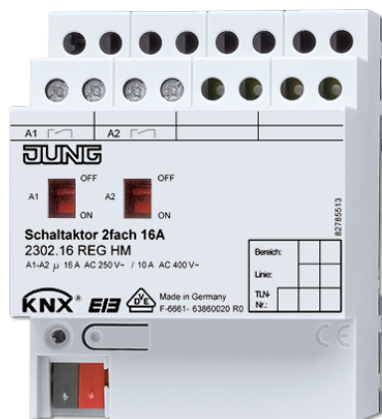

### Reference number

2302.16 REGHM

### Switch actuator, 2-gang

Rail mounting device, 4 rail units  
 2 NO contacts with manual mechanical operation and status indicator  
 ETS product family: Output  
 Product type: Binary output

### Intended use

- Switching of 110 ... 230 V AC or 24 V AC/DC electrical loads with floating contacts
- Mounting on DIN rail according to EN 60715 in distribution boxes

### Product characteristics

- Manual switching of the relays is independent of the bus
- Operation as NO or NC contacts
- Logic operation and forcing function
- Switching feedback (bus operation only)
- Switch position display
- Central switching function with collective feedback
- Disabling function for each channel
- Time functions: switch-on delay, switch-off delay, staircase lighting timer with pre-warning function
- Integration into light scenes
- Operating hours counter, configurable via bus
- Input monitoring for cyclical updating with safety circuit
- No additional power supply necessary

### Technical data

KNX medium:	TP 256
Rated voltage KNX:	DC 21 ... 32 V SELV
Connection, KNX:	terminal
Power consumption KNX:	typical 150 mW
Power loss:	max. 2 W
Ambient temperature:	-5 ... +45 °C
Storage/transport temperature:	-25 ... +70 °C
Mounting width:	72 mm (4 rail units)
Connection, outputs	
Connection mode:	screw terminals
single wire:	1 x 0.5 ... 4 mm <sup>2</sup>
stranded without ferrule:	1 x 0.5 ... 4 mm <sup>2</sup>
stranded with ferrule:	1 x 0.5 ... 2.5 mm <sup>2</sup>
Switching outputs	
Contact type:	floating relay contacts (µ contact)
Switching voltage AC:	AC 250 / 400 V
Switching current 230 V AC1:	16 A
Switching current 230 V AC3:	10 A
Switching current 400 V AC1:	10 A
Switching current 400 V AC3:	6 A

Fluorescent lamps:	10 AX
Ohmic load:	3680 W
Capacitive load:	10 A / 140 $\mu$ F
Switching voltage DC:	DC 12 ... 24 V
Switching current DC:	16 A
Min. switching current:	100 mA
Switch-on current 150 $\mu$ s:	400 A
Switch-on current 600 $\mu$ s:	200 A
Lamp loads	
Incandescent lamps:	2500 W
HV halogen lamps:	2500 W
LV halogen lamps with	
inductive transformers:	1200 VA
electronic transformers:	1500 W
Fluorescent lamps T5/T8	
non-compensated:	2500 W
parallel compensated:	1300 W / 140 $\mu$ F
lead-lag circuit:	2,300 W / 140 $\mu$ F
Compact fluorescent lamps	
non-compensated:	2500 W
parallel compensated:	1300 W / 140 $\mu$ F
Mercury vapour lamps	
non-compensated:	2000 W
parallel compensated:	2000 W / 140 $\mu$ F
Approvals:	VDE

