


Product data sheet

Analogue actuator module, 4-gang

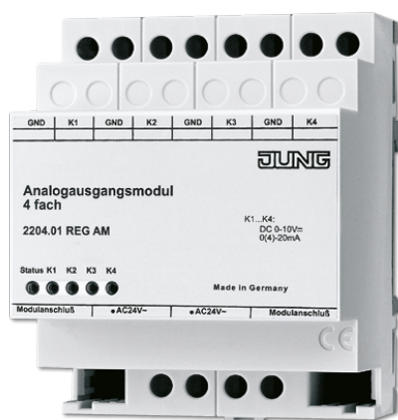

Reference number

2204.01 REGAM

Analogue actuator module, 4-gang

Rail mounting device, 4 rail units

Extension module for analogue actuator 4-gang ref.-no.: 2204.01 REGA

Function

- The analogue actuator module extends a KNX analogue actuator 4-gang by four additional sensor outputs.
 - The analogue output extension module offers four analogue outputs which can be software parameterised for one of the following ranges.
 - Outputs not used can be deactivated.
- Voltage signals: 0 ... 1 V DC 0 ... 10 V DC
Current signals: 0 ... 20 mA DC 4 ... 20 mA DC

Technical data

Power supply

Supply voltage: AC 24 V ~ ± 10 %

Current consumption: max. 120 mA

Current consumption at system connector: 6 mA

Ambient temperature: -5 ... +45 °C

Storage/transport temperature: -25 ... +70 °C

Humidity

Ambient/storage/transport: max. 93 % r. h., no condensation

Mounting width: 72 mm (4 rail unit)

Weight: approx. 155 g

Terminals

Outputs, power supply: screw terminals

single wire: 1 x 0.5 ... 4 mm²

stranded without ferrule: 72 mm (4 rail unit)

stranded with ferrule: 1 x 0.5 ... 2.5 mm²

Connection KNX device: KNX bus connection block

Analogue outputs

Number: 4

Ranges: 0 ... 1 V DC, 0 ... 10 V DC, 0 ... 20 mA DC, 4 ... 20 mA, DC

Voltage signal load: ≥ 1 kW

Current signal load: ≤ 500 W