


Product data sheet

Universal push-button module 3-gang

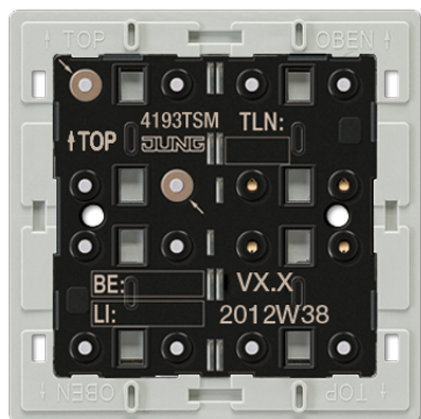

Reference number

4193 TSM

Universal push-button module, 3-gang

for cover kit 3-gang, ref.-no.: .. 403 TSA ..
 for cover 2-gang with symbols, ref.-no.: .. 402 TSAP ..
 for cover 4-gang with symbols, ref.-no.: .. 404 TSAP ..
 can be extended by means of a push-button extension module, ref.-no.: 409.. TSEM
 Adapter frames are included in delivery: ref.-no. LS 4 AR for LS range (pre-mounted) and
 ref.-no. CD 4 AR for CD range.
 AS / A ranges without adapter frame.
 Only with the ETS 3.0d version or later versions the full functionality will be available.
 ETS product family: Push-button
 Product type: 3-gang push-button
 1 blue LED: operation indication
 6 red LED: status indication

Intended use

- Operation of loads, e.g. light on/off, dimming, blinds up/down, brightness values, temperatures, calling up and saving light scenes, etc.
- Installation in flush box according to DIN 49073

Product characteristics

- KNX medium: TP 256
- Push-button functions switching, dimming, blind control, value transmitter, scene recall, etc.
- Measurement of room temperature
- To be completed with cover kit
- Two red status LEDs per button
- One blue operation LED as an orientation light and to indicate the programming status
- Integrated bus coupling unit
- One, two or three functions per button
- Push-button function or rocker function, vertical or horizontal
- Connection for a push-button extension module, 1-4 gang
- Transparent cover kit (included) for temporary site use without design covers