


# Product data sheet

## Satellite insert 2-wire

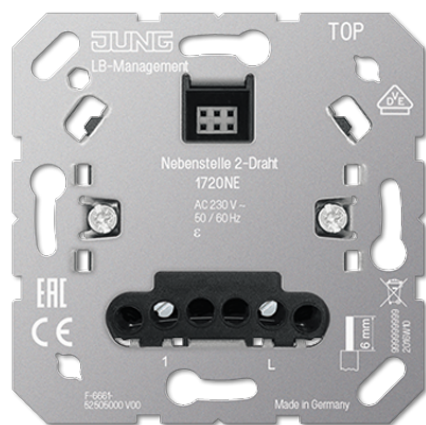

### Reference number

1720 NE

### Satellite insert 2-wire

for covers ref.-no.: .. 1700 ..

### Intended use

- Extension unit operation of suitable inserts of the LB Management
- Operation with standard centre plate
- Installation in flush box according to DIN 49073

### Centre plates:

Centre plate: .. 1700 ..

### Technical data

Rated voltage:	AC 230 V ~
Mains frequency:	50/60 Hz
Ambient temperature:	-20 ... +45 °C
Connection:	screw terminals
single wire:	1 x 0.5 ... 4.0 mm <sup>2</sup> 2 x 0.5 ... 2.5 mm <sup>2</sup>
stranded without ferrule:	1 x 0.5 ... 4.0 mm <sup>2</sup> 2 x 0.5 ... 2.5 mm <sup>2</sup>
stranded with ferrule:	1 x 0.5 ... 4.0 mm <sup>2</sup> 2 x 0.5 ... 1.5 mm <sup>2</sup>
Total length of extension unit cable:	max. 100 m