


# Product data sheet

## Satellite insert 3-wire

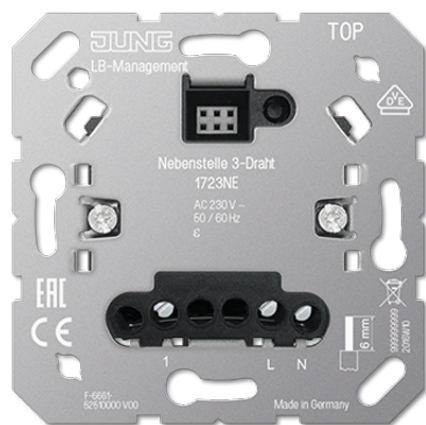

### Reference number

1723 NE

### Satellite insert 3-wire

for covers ref.-

no.: .. 1700 .., .. 1701 .., .. 1702 .., .. 1750 D .., .. 1751 BT .., .. 17180 .., .. 17280 .., .. 17181 .., .. 17281 .., DWPM 17360 ..

### Intended use

- Extension unit operation of suitable inserts of the LB Management
- Satellite for extending the detection field of motion and presence detectors
- Central control of multiple main devices
- Operation with suitable cover of the LB Management
- Installation in flush box according to DIN 49073
- Neutral conductor required

### Technical data

Rated voltage:	AC 230 V ~
Mains frequency:	50/60 Hz
Ambient temperature:	-20 ... +45 °C
Connection:	screw terminals
single wire:	1 x 0.5 ... 4.0 mm <sup>2</sup> 2 x 0.5 ... 2.5 mm <sup>2</sup>
stranded without ferrule:	1 x 0.5 ... 4.0 mm <sup>2</sup> 2 x 0.5 ... 2.5 mm <sup>2</sup>
stranded with ferrule:	1 x 0.5 ... 4.0 mm <sup>2</sup> 2 x 0.5 ... 1.5 mm <sup>2</sup>
Total length of extension unit cable:	max. 100 m