


Product data sheet

Universal blinds insert

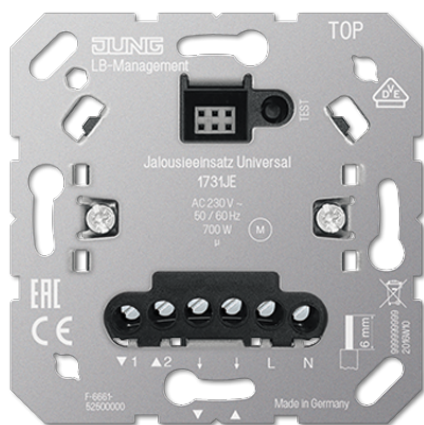

Reference number

1731 JE

Universal blinds insert

with satellite input
for covers ref.-no.: .. 1700 .., .. 1701 .., .. 1750 D .., .. 1751 BT ..

Intended use

- Controlling electrically driven blinds, rolling shutters and awnings
- Automatic time control via cover or satellite input
- Operation with suitable cover of the LB Management
- Installation in flush box according to DIN 49073

Product characteristics

- The integration into group controls or master controls is possible by means of extension inputs
- Automatic control via timer
- Test operation for functional test
- Operation as a main device or extension unit
- Wind alarm interlock via the extension input
- Pole changing of outputs for simplified commissioning from version V01 upwards
- Saving of a ventilation position possible using the cover

Technical data

Rated voltage:	AC 230 V ~
Mains frequency:	50/60 Hz
Ambient temperature:	-5 ... +45 °C
Contact type:	μ
Stand-by power:	max. 0.2 W
Running time:	approx. 120 s
Connected load	
Motors:	700 W
Connection	
Connection mode:	screw terminals
single wire:	1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ²
stranded without ferrule:	1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ²
stranded with ferrule:	1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 1.5 mm ²