


Product data sheet

Room thermostat with display standard

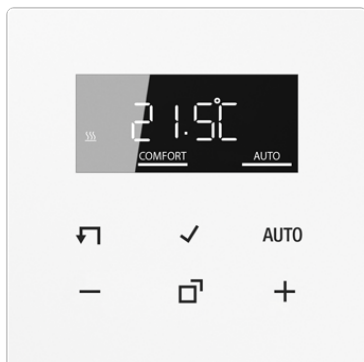

Reference number

TR DLS1790XX

Room thermostat with display standard

consists of room thermostat insert (ref.-no.: 1790 RTR) and display (ref.-no.: .. 1790 D ..)

Technical data

| | |
|--|---|
| Rated voltage: | AC 230 V ~ |
| Mains frequency: | 50/60 Hz |
| Stand-by power depending on the cover: | approx. 0.1 ... 0.5 W |
| Switching current 230 V AC1: | 10 mA ... 16 A |
| Connected load: | max. 3,600 W |
| Connection | |
| single wire: | 1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ² |
| stranded without ferrule: | 1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 2.5 mm ² |
| stranded with ferrule: | 1 x 0.5 ... 4.0 mm ² 2 x 0.5 ... 1.5 mm ² |
| Ambient temperature: | -5 ... +45 °C |
| Accuracy per month: | ± 10 s |
| Power reserve: | > 4 h |

Range:

LS range

Material:

glass