



Smart Home HVAC controller

Description


- 1-way flush-mounted actuator for electric heating LUXORliving
- Easy installation due to the compact housing
- For direct connection of electric heating with high switching capacity
- Integrated temperature controller can also be configured as an additional heater
- Additional stage function for simple control of a second heat generator
- 2 binary inputs for floating contacts such as buttons, switches, temperature sensor (I2)
- Integrated temperature monitoring for increased operating safety, e.g. in the event of overload
- The binary inputs are assigned to the dimming output as standard (function test before programming)
- Download of the installation software LUXORplug at $\table{https://luxorliving.de/luxorplug}$



Technical data

LUXORliving E1		LUXORIiving E1	
Operating voltage KNX	Bus voltage, ≤4 mA	Type of contact	16 A
Installation type	Flush-mounted	Ambient temperature	-5°C 45°C
Number of channels	1		


Connection example



LUXORliving E1 Item no.: 4800542



Scale drawings

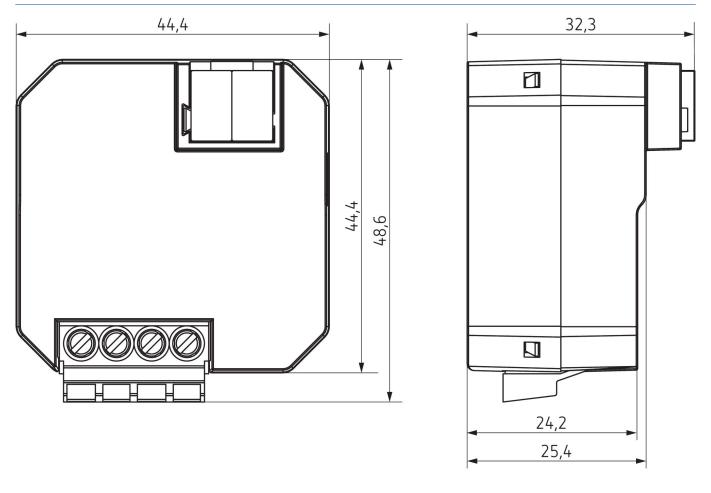

Accessories

Temperature sensor Item no.: 9070321



Temperature sensor RAMSES IP 65 Item no.: 9070459



Flush-mounted temperature sensor Item no.: 9070496

