


Product data sheet

USB charger

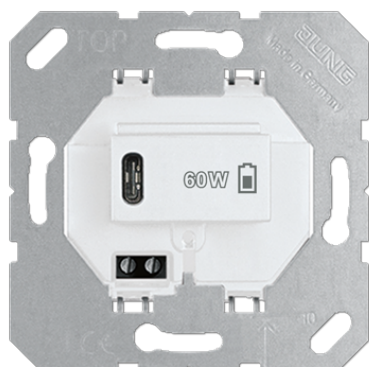

Reference number

USB PD60 C WW / USB PD60 C WW

USB charger

with 1 USB port type C
screw fixing only, without claws

Intended use

- Battery charging station for mobile devices with USB connection
- Installation in flush box with dimensions according to DIN 49073

Product characteristics

- Quick charge function USB Power Delivery (PD)
- Supports PD3.0, Quick Charge 4+ and PPS (Programmable Power Supply), among others
- Charging capacity up to 60 W
- Installation into multiple frame with other devices possible

Centre plates:

AS / A ranges: ref.-no. A 1569 USB ..

CD range: ref.-no. CD 569 T ..

LS range: ref.-no. .. 1969 USB ..

Hinged lids with symbol:

CD range: ref.-no. CD 590 KL USB ..

LS range: ref.-no. LS 990 BFKL USB .., .. 2990 KL USB ..

Technical data

Input voltage:	AC 220 ... 240 V ~ ± 10 %
Mains frequency:	50/60 Hz
Ambient temperature:	0 ... +45 °C
Stora/transport temperature:	-20 ... +70 °C
Stand-by power:	≤ 0.1 W
Connection mode:	screw terminals
Terminals for:	0.75 ... 2.5 mm ²
Output voltage:	DC 5 ... 20 V (±5 %)
Output current:	max. 3 A
Charging capacity:	15 ... 60 W

Colour:

white / Blsk