

PresenceLight 180B-KNX WH

Item no.: 2009050



Presence and motion detectors Indoor detectors

Description

- Presence detector (PIR)
- Type of protection IP 54
- Mixed light measurement
- Detection area 180°
- Wall installation
- Presence and brightness-dependent control for lighting and HVAC systems
- Choice of fully or semi-automatic lighting control
- Connection option for sensors or switches for manual switching with automatic recognition
- Adjustable sensitivity
- Can be configured remotely
- Installation with mechanical stop
- Lighting control with brightness threshold value and self-learning switch-off delay
- Pulse function for staircase time switch
- Presence output with switch-on and switch-off delay
- Room monitoring with selective movement detection
- Parameters can be selected for subsequent changes
- Test operation mode checks the detection area and brightness threshold
- Management remote control SendaPro 868-A (optional)
- theSenda S user remote control (optional)



Technical data

PresenceLight 180B-KNX WH	
Installation height	1.6 – 2.2 m
Measuring range brightness	5 – 2000 lx
Detection angle	180°
Type of connection	KNX bus terminal
Installation type	Wall installation
Light switch-off delay	30 s-60 min
Lamps	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs

PresenceLight 180B-KNX WH	
Light measurement	Mixed light measurement
Stand-by time light	30 s – 60 min , on, inactive
Presence switch-off delay	10 s-120 min
Switch-on delay presence	10 s – 30 min / inactive
Ambient temperature	-10°C ... 50°C
Detection range	100 m² (ø 16 m 180°)
Colour	White
Type of protection	IP 54

Detection range for planning applications

Mounting height (A)	Walking (T)	Sitting (S)
2.2 m	100 m² 8 m	25 m² 7 m x 3.5 m

Subject to technical changes and misprints

additional information at: www.theben.de/product/2009050

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

20/07/2020


Page 1 of 2

PresenceLight 180B-KNX WH


Item no.: 2009050

theben
energy saving comfort

Detection range for planning applications

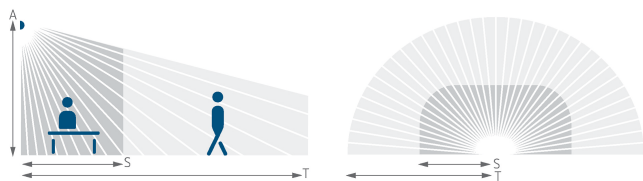

Scale drawings

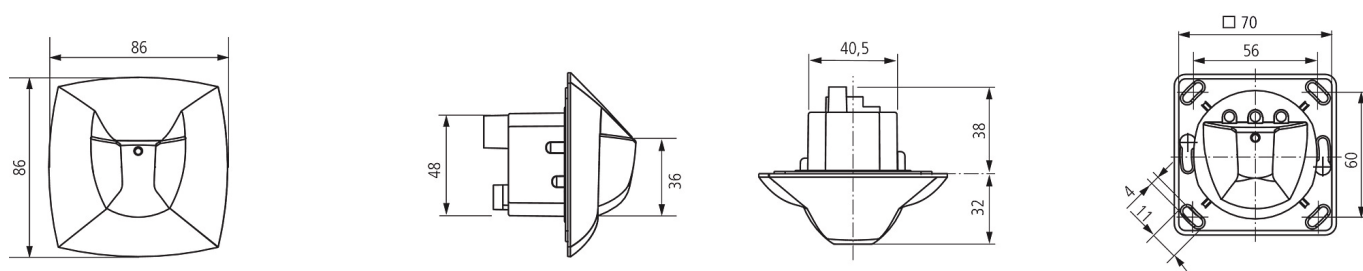

Accessories

theSenda S

Item no.: 9070911




Cover frame PresenceLight 180 WH

Item no.: 9070629



Cover frame PresenceLight 180 SR

Item no.: 9070627



Cover frame PresenceLight 180 BK

Item no.: 9070628



Surface frame PresenceLight

Item no.: 9070513



theSenda B

Item no.: 9070985



Subject to technical changes and misprints

additional information at: www.theben.de/product/2009050

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

20/07/2020

Page 2 of 2