

# HMT 12 S KNX

Item no.: 4900374

## Home and Building control KNX

### Description

- Heating actuator for controlling 12 heating circuits with thermal actuators, switching 24 V DC or permanently 0–10 V DC
- Integration of up to 2 heating circuit pumps
- Flow temperature adjustment to meet requirements: Automatic calculation of the maximum actuating value for energyefficient adjustment of the actuating value to actual requirements
- No KNX room thermostat needed: Flexible use of each channel as a heating actuator or heating controller
- Can be installed directly on a rail in the heating circuit distributor
- Screwless terminal technology
- Integrated power supply for thermal actuators
- For integrating boiler control
- Continuous or switching actuating value selectable




### Technical data

HMT 12 S KNX	
Operating voltage KNX	Bus voltage, $\leq 10$ mA
Operating voltage	230 – 240 V AC
Stand-by consumption	$\leq 1$ W
Frequency	50 – 60 Hz
Number of channels	12
Installation type	Wall installation

HMT 12 S KNX	
Type of connection	Spring terminals
Ambient temperature	-5°C ... 50°C
Type of protection	IP 20
Protection class	II according to EN 60 730-1

### Connection example

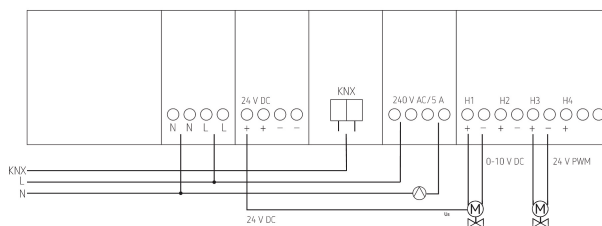

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4900374](http://www.theben.de/product/4900374)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# HMT 12 S KNX

Item no.: 4900374

**theben**  
energy saving comfort

## Scale drawings

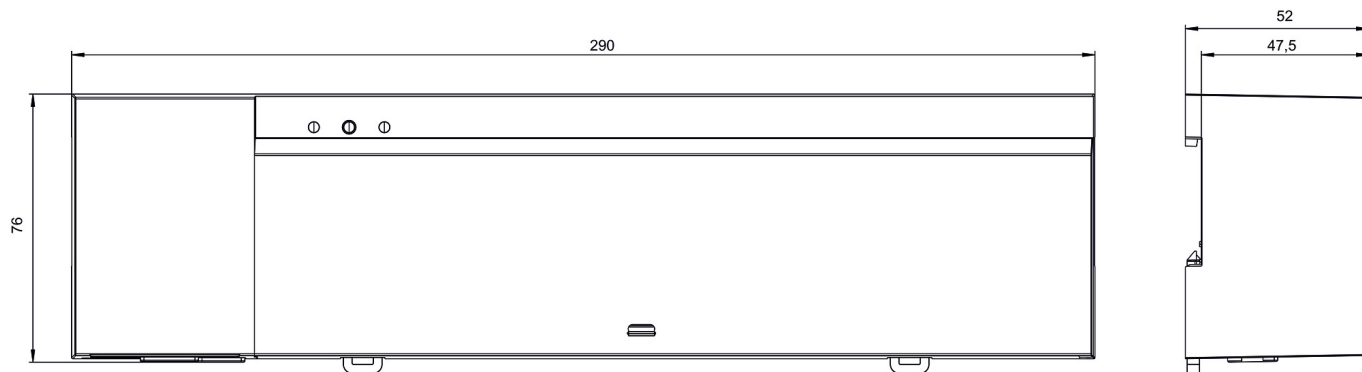

## Accessories

Actuator ALPHA 5 24 V

Item no.: 9070442



Subject to technical changes and misprints

additional information at: [www.theben.de/product/4900374](http://www.theben.de/product/4900374)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

20/07/2020

Page 2 of 2